

rullari®



ROLLER SHUTTER CURTAIN

ME 30 U | ME 30 R | ME 30 S



ME 30 U ME 30 R | ME 30 S

Aluminum Rullari roller shutter curtains are designed and manufactured in Finland. The starting point for the design has been Scandinavian architecture. Kokema Oy has almost 40 years' experience in roller shutter curtain manufacturing. The lightweight and durable material creates a high-quality and stylish package, without forgetting the ease of use. The Rullari roller shutter curtains are CE compliant (EN13241). Rullari roller shutter curtains are suitable for both indoor and outdoor use. The curtains are made to the customer's specifications and highly professional installation services are available all over Finland for flexible installation. Uses include serving lines, customer service points, restaurants, kiosks, etc...

SLAT CURTAIN

The slat curtain of the Rullari roller shutter curtain consists of a 30 mm wide extruded aluminium profile, and the profile ends are locked together by means of screws. The ME 30 U slat is closed and the ME 30 R slat is perforated either with rectangle holes or oval holes. The maximum size of the roller shutter curtain is 3000 x 1500 mm. The weight of the curtain is approx. 6 kg/m².

GUIDE RAILS, FIXING ANGLES AND ROLLER BARREL

Aluminium guide rails on the sides of the curtain (53 x 22 mm) are also made of extruded aluminium. Guide rails are equipped with PVC slide belts. The gloss galvanized fixing angles for the roller barrel are already installed on the guide rails. The roller barrel is made of galvanized or painted steel. There is a tubular motor inside the roller barrel.

OPERATION

Rullari roller shutter curtains are electrically operated and force controlled. The standard motor used in the curtains is a single-phase tubular motor. Curtains are controlled via pushbuttons or a lockable key switch. ME 30 U and ME 30 R roller shutter curtains are also available as hand-operated.

LOCKING

The curtains are equipped with automatic locks. Hand-operated curtains can be equipped with lever bolt locks or Abloy furnishing locks.

SURFACE TREATMENT

The roller shutter curtains are delivered with standard natural color anodising. The curtains can also be powder coated with RAL Classic colour tone or colour anodised.

ADDITIONAL OPTIONS

- Emergency operation (manual opening of the motor in case of power failure)
- Pural-coated metal casing (max. door size in casing: 3000 x 1500 mm)
- The aluminium protective case, powder coated RAL Classic tone


KOKEMA_{OY}

Kakkulaistentie 5, 32800 Kokemäki


Tel. +358 10 326 3840

info@kokema.fi | www.kokema.fi


STRUCTURE

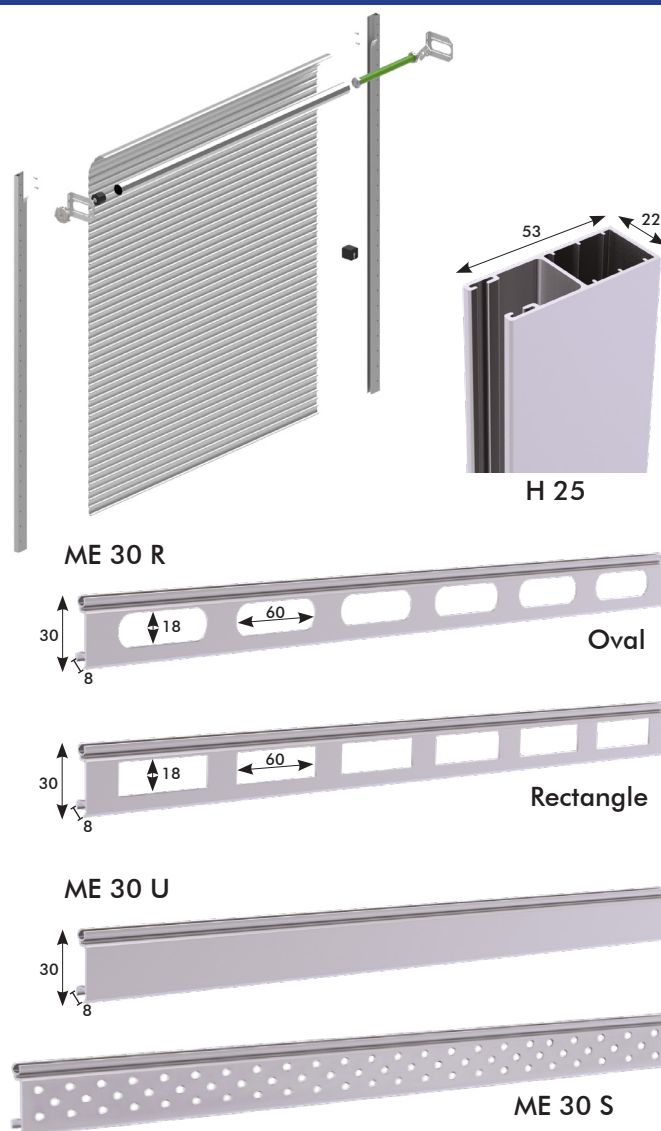

INSTALLATION OPTIONS

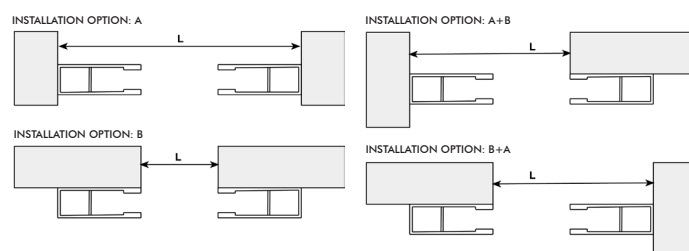

VERTICAL DIMENSIONING

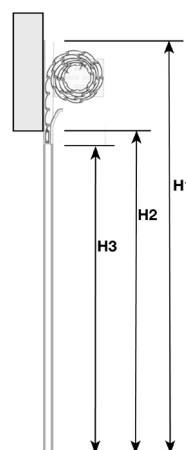

Height of the opening (H2):

1000 mm
1500 mm

The space required by the roll (H1-H2):

180 mm
200 mm